HiSeq™ 2000 Sequencing System

Redefining the trajectory of sequencing.

HiSeq 2000 Highlights

- **Unprecedented Output:**
  Generate up to 200 Gb per run, 2 x 100 bp read length, up to 25 Gb per day, two billion paired-end reads per run.
- **Breakthrough User Experience:**
  Easily set up runs with simplified library prep, automated clonal amplification, pre-configured, plug-and-play reagents, simple flow cell loading, touch screen-enabled user interface, and integrated paired-end fluidics.
- **Unmatched Cost-Effectiveness:**
  Lowest operating cost. In a single run, sequence two human genomes at ~30x coverage for less than $10,000 each, or perform 200 gene expression profiles for less than $200 per sample, including sample preparation.

Sequence at a Scale Never Before Possible

The HiSeq 2000 sequencing system (Figure 1) offers unprecedented output and a breakthrough user experience. Leveraging Illumina's proven and widely-adopted, reversible terminator-based sequencing by synthesis chemistry in combination with innovative engineering, HiSeq 2000 delivers the industry's highest sequencing output and fastest data generation rate. Human interaction design features and the easiest sequencing workflow set a new standard for simplicity and user experience. With unmatched cost-effectiveness, HiSeq 2000 is the first commercially available sequencer to enable researchers to obtain ~30x coverage of two human genomes in a single run for under $10,000 (USD)* per sample.

Unprecedented Output

HiSeq 2000 makes it possible for individual labs to take on the largest and most complex sequencing studies at the lowest cost. With cutting-edge scanning and imaging technology, clusters on both surfaces of the flow cell can be sequenced, dramatically increasing the number of reads, sequence output, and data generation rate. The ultra-high output and speed of HiSeq 2000 now make it possible to sequence two human genomes at ~30x coverage simultaneously, up to 200 gene expression samples in a single run, or one billion tags per day for short-read applications.

*Reagent costs at list price.

Breakthrough User Experience

Innovative design features make HiSeq 2000 the easiest-to-use next-generation sequencing system (Figure 2). Flow cells are loaded on the vacuum-controlled loading dock. Pre-configured, plug-and-play reagents sufficient for up to 200 cycles drop into racks in the machine's chiller compartment, requiring only two minutes of hands-on time. A simple touch screen user interface, including on-screen, step-by-step instructions with embedded multimedia help, simplifies run setup. Real-time progress indicators provide at-a-glance status, and remote monitoring allows a single user to check progress on multiple systems from any browser or internet-enabled phone. HiSeq 2000 can be operated in single or dual flow cell mode, offering unmatched experimental flexibility and instrument scalability. Independently-operable flow cells allow applications requiring different read lengths to run simultaneously.

Figure 1: HiSeq 2000

Illumina's HiSeq 2000 sequencing system enables individual labs to take on larger and more complex studies, including routine human genome sequencing.

Figure 2: HiSeq 2000 Innovative Design Features

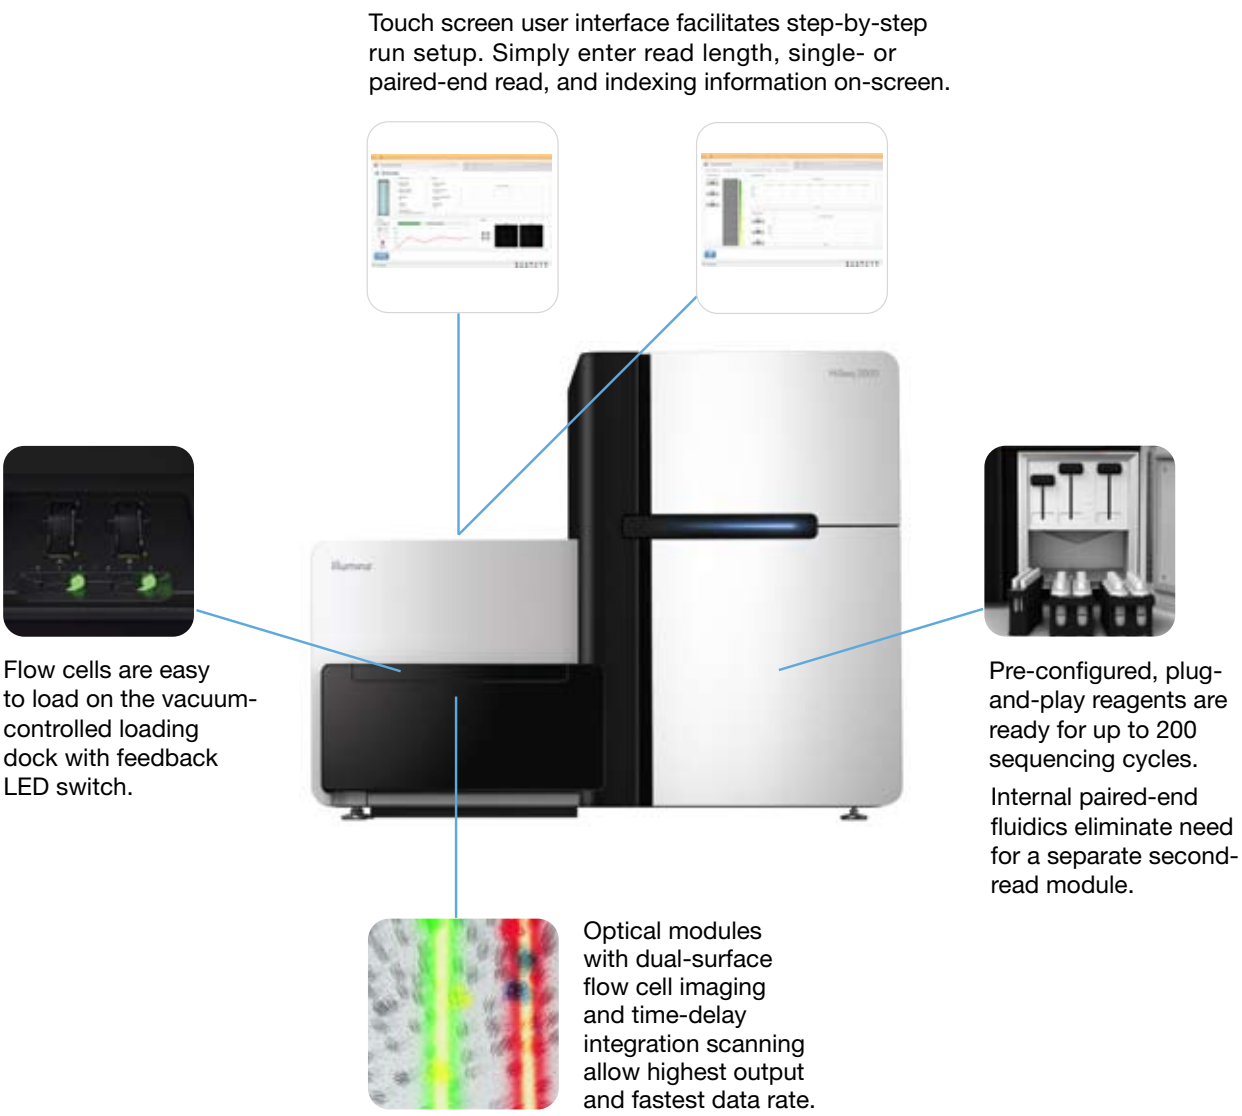

HiSeq 2000 redefines the trajectory of sequencing. Innovative engineering and human interaction design features provide a breakthrough user experience and unmatched cost-effectiveness.

Figure 3: Next-Generation Sequencing Simplified

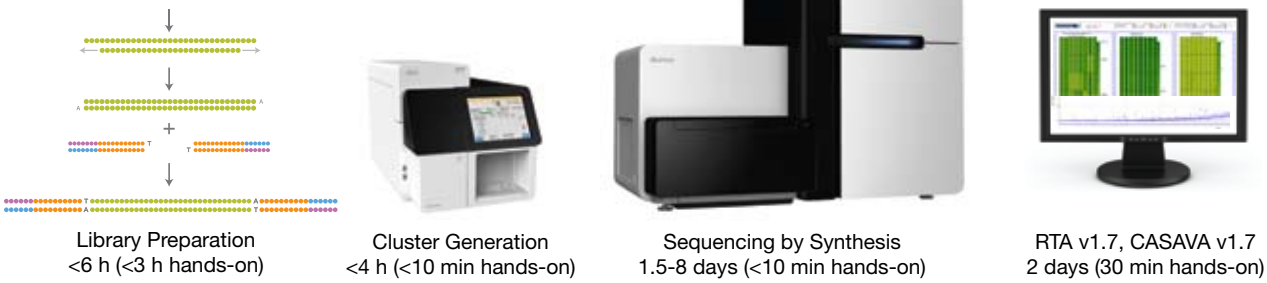

Library Preparation
<6 h (<3 h hands-on)

Cluster Generation
<4 h (<10 min hands-on)

Sequencing by Synthesis
1.5-8 days (<10 min hands-on)

RTA v1.7, CASAVA v1.7
2 days (30 min hands-on)

From simplified sample preparation kits, to automated cluster generation, to streamlined sequencing by synthesis, to complete data analysis, Illumina's HiSeq 2000 sequencing system offers the industry's simplest next-generation sequencing workflow.

Easiest Sequencing Workflow

The Illumina sequencing workflow is based on three simple steps: libraries are prepared from virtually any nucleic acid sample, amplified to produce clonal clusters, and sequenced using massively parallel synthesis. With HiSeq 2000, library preparation is performed using Illumina's simplified sample prep kits. Cluster generation occurs on the cBot automated cluster generation system, where hands-on time is less than ten minutes, compared to more than six hours of hands-on effort for emulsion PCR methods. The process of creating sequencing templates is complete in about four hours per flow cell. For sequencing, either one or two flow cells can be loaded on HiSeq 2000, enabling different experimental conditions to be run simultaneously. Pre-configured sequencing reagents are dropped in the instrument reagent racks prior to the start of the run.

Streamlined Data Analysis Solution

Accompanying the unprecedented sequencing output of HiSeq 2000 is Illumina's data analysis solution for transforming billions of bases of raw sequencing data into publishable, biologically meaningful results. HiSeq Control Software offers real-time analysis processing that automatically produces image intensities and quality-scored base calls on the instrument computer for alignment to a reference sequence and subsequent analysis. In combination with the Consensus Assessment of Sequence and Variation (CASAVA) software, GenomeStudio® data analysis software provides intuitive, graphical analysis. The optional IlluminaCompute system is available as a comprehensive and scalable computing architecture for genomic data processing and analysis. IlluminaCompute is an individually configured, pre-packaged data analysis solution consisting of scalable processing, scale-out storage, and comprehensive support for installation, training, and maintenance.

Accelerate Your Research with HiSeq 2000

HiSeq 2000 redefines the trajectory of sequencing by combining innovative engineering with proven sequencing by synthesis chemistry to set new standards for output, simplicity, and cost-effectiveness. With HiSeq 2000, the ability to process larger numbers of samples and to decode larger and more complex genomes means that virtually any sequencing project is now within reach.

HiSeq 2000 Information

HiSeq 2000 Preliminary Performance Parameters*

Read Length	Run Time	Output
1 × 35 bp	~1.5 days	26–35 Gb
2 × 50 bp	~4 days	75–100 Gb
2 × 100 bp	~8 days	150–200 Gb

*Sequencing output generated with a PhiX library and cluster densities between 260,000–347,000 clusters/mm^2 that pass filtering on a HiSeq 2000.

Throughput
Up to 25 Gb per day for a 2 x 100 bp run.

Reads
Up to one billion clusters passing filter, and up to two billion paired-end reads.

Service and Support
Illumina will ensure that your HiSeq 2000 is properly installed and qualified, and will provide ongoing maintenance and service. This industry-leading support is available in North America, Europe, and Asia.

HiSeq 2000 Kits and Accessories

Application	Catalog No.
HiSeq 2000 Sequencing System	SY-401-1001
cBot Clonal Amplification System	SY-301-2002
Paired-End DNA Sample Prep Kit	PE-102-1001
Genomic DNA Sample Prep Kit	FC-102-1001
HiSeq Paired-End Cluster Generation Kit	PE-401-1001
HiSeq Sequencing Kit (200 cycles)	FC-401-1001

HiSeq 2000 System Specifications

Catalog No. SY-401-1001

Instrument Configuration
CE marked and ETL listed instrument
Computer and flat panel display
Installation setup and accessories
Data collection and analysis software

Instrument Control Computer
Base Unit: 2x Intel Xeon X5560 2.8 GHz CPU
Memory: 48 GB RAM
Hard Drive: 4x 1.0 TB 7200 RPM SATA
Operating System: Windows Vista
Note: Computer specifications will be regularly upgraded.
Contact your local account manager for current configuration.

Operating Environment
Temperature: 22°C ± 3°C
Humidity: Non-condensing 20%–80%
Altitude: Less than 2,000 m (6,500 ft)
Air Quality: Pollution degree rating of II
Ventilation: Maximum of 4,000 BTU/h
For Indoor Use Only

Laser
532 nm, 660 nm, 700–840 nm, 650 nm (barcode reader)

Dimensions
W×D×H: 118.6 cm × 72.6 cm × 94.7 cm
(46.7 in × 28.6 in × 37.3 in)
Weight: 209.5 kg (462 lbs)
Crated Weight: 282.1 kg (622 lbs)

Power Requirements
100–240V AC 50/60Hz, 20A, 1500W

Illumina provides a region-specific uninterruptible power supply with the HiSeq 2000 instrument.

Illumina, Inc. • 9885 Towne Centre Drive, San Diego, CA 92121 USA • 1.800.809.4566 toll-free • 1.858.202.4566 tel • techsupport@illumina.com • illumina.com

FOR RESEARCH USE ONLY

© 2010 Illumina, Inc. All rights reserved.
Illumina, illumina*Dx*, Solexa, Making Sense Out of Life, Oligator, Sentrix, GoldenGate, GoldenGate Indexing, DASL, BeadArray, Array of Arrays, Infinium, BeadXpress, VeraCode, IntelliHyb, iSelect, CSPro, GenomeStudio, Genetic Energy, and HiSeq are registered trademarks or trademarks of Illumina, Inc.
All other brands and names contained herein are the property of their respective owners.
Pub. No. 770-2009-036 Current as of 11 January 2010

illumina®